

Factors Influencing Chemical Absorption of CO₂ and H₂S in biogas: A Review

O.I. Maile, H. Tesfagiorgis, and E. Muzenda, *Member, IAENG*

Abstract—Absorption is a process in which a substance (solute) is brought into contact with a solvent normally for a purpose of separation, which can be either physical or chemical. pH and concentration of the solvent, temperature of both the gas and the solvent, and absorbing surface area influence the absorption process. pH affect the absorption rate and if an acid or base is added into the system the absorption rate is lowered. Concentration of carbon dioxide in the gas stream and the loading rate influence the rate of absorption. MEA has an optimum absorption rate at liquid temperature of 35 °C. Ammonia has high removal efficiency at ambient temperature and there exists a direct relationship between absorption rate and temperature. Absorption of CO₂ with sodium hydroxide is normally done at a temperature range of -1-16 °C (30-60 °F). Calcium oxide requires high temperature for absorption ranging from 300-390 °C, while 22-80 °C is used for H₂S absorption with K₂CO₃. A linear increase results from heating the CO₂ gas stream prior to absorption. The rate of absorption is influenced by the contact area between the absorbing fluid and the gas.

Keywords—Absorption rate, efficiency, solvent, temperature

I. INTRODUCTION

Absorption is a process in which a substance (solute) is brought into contact with a solvent normally for a purpose of separation, which can be either physical or chemical. Physical absorption occurs when a gas is absorbed into a liquid with no reaction taking place. For instance, carbon dioxide is absorbed into water. On the contrary, a chemical reaction occurs when the gas is absorbed into the solvent for chemical absorption. An example is carbon dioxide absorption into alkanolamine solutions [1]. For gas absorption to occur, the gas is firstly contacted with the liquid through bubbling or passing it over

Manuscript received June XX, 20XX; revised July XX, 20XX. (Write the date on which you submitted your paper for review.) This work is supported in part by Global Excellence Scholarship (GES) and the South African National Energy Development Institute (SANEDI).

O. I. Maile is with the department of Chemical Engineering, University of Johannesburg, Doornfontein, Johannesburg, South Africa, 2028 (+27720789798; ireenmaile@yahoo.com).

H. Tesfagiorgis is with the Agricultural Research Council – Institute for Industrial Crops, Private Bag X82075, Rustenburg 0300, South Africa (tesfagiorgish@arc.agric.za)

E. Muzenda is a Professor of Chemical and Petroleum Engineering and Head of Department: Department of Chemical, Materials and Metallurgical Engineering, College of Engineering and Technology, Botswana International University of Science and Technology, Private Mail Bag 16, Palapye, Botswana, and as well as Visiting Professor at the University of Johannesburg, department of Chemical Engineering, Faculty of Engineering and the Built Environment, Johannesburg, P O Box 17011, 2028, South Africa Email: muzendae@biust.ac.bw

streams of the liquid [2]. A counter current flow configuration is normally preferred in absorption mainly because a large surface area for mass transfer is needed for an effective absorption.

Factors affecting absorption include pH of the solvent and the concentrations and temperatures of both the gas and the solvent [3]. Kibicho et al. [4] suggested that different solvents perform differently upon heating and that the temperature of both phases influence the reaction mechanism. Subsequently, rate of absorption involves a complex relationship between time, turbulence and temperature. Hsu et al. [3] studied the effect of temperature in the ranges of 25-75 °C and recorded that 75 °C resulted in best absorption. Therefore an opportunity to investigate a temperature above 75 °C exists.

NaOH is a good CO₂ absorbent, but KOH proved to be even better because when its used for the same process it captures 27% more CO₂ and only uses 125 kWhr/ton CO₂ energy [4]. A solvent is considered economically attractive if it has low energy requirements, can be regenerated easily, does not impose environmental impacts and cost effective.

The purpose of this work was to unpack the factors that affect absorption of CO₂ and H₂S into chemical solvent for biogas purification. With the main focus being temperature, concentration and pH of the liquid without neglecting the gas phase. This work will however be further studied in laboratory conditions at a later stage to validate the results with available literature.

II. FACTORS AFFECTING THE ABSORPTION

A. pH of the solvent

pH affects the absorption process and therefore, the absorption rate. Addition of acid or base leads to low absorption rate [3]. When KOH and NaOH were used, the optimum pH was found to be 13.3 and 12.9, respectively [5]. Ammonia and amines had the best pH value of 11.5-12 [3]. Fig. 1 shows the effect of pH on CO₂ absorption using MEA and ammonia. In a study conducted by Wubs et al [6] reaction kinetics of H₂S with ferric chelates of EDTA and HEDTA were established. From a stirred cell reactor with a varying pH (4-10), it was established that pH plays an important role in oxidative absorption.

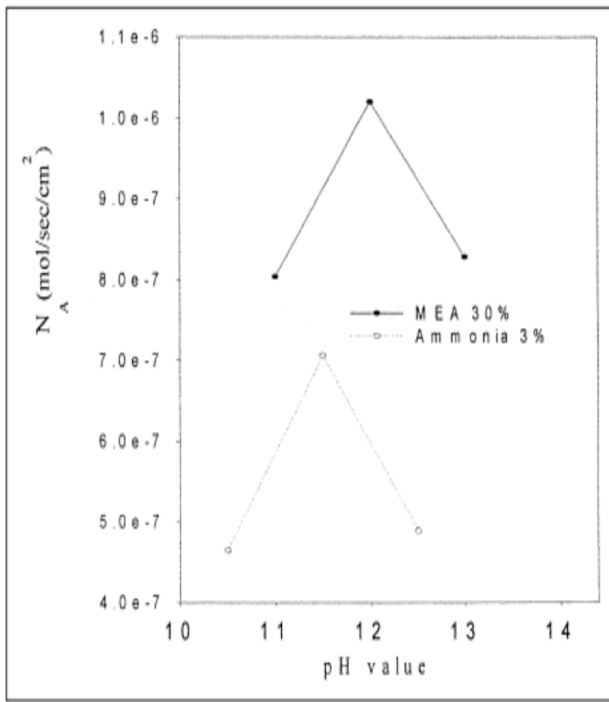


Fig. 1. The effect of pH value on the absorption rate of CO₂ into various aqueous absorbents [3].

B. Concentration of the absorbent

Concentration plays an important role in absorption. Factors that affect the absorption include: (i) gas loading rate, (ii) increase in solution viscosity which decrease diffusion coefficient and absorption rate [7]. H₂S absorption rate is directly proportional to the concentration of K₂CO₃ in the solution [7]. The same author/s further showed that the rate of CO₂ absorption increases initially and then decreases as the concentration solution increase [7]. It must be taken into account that the concentration of the CO₂ in the gas stream influences the absorption rate [8, 9]. Since the absorption of CO₂ decreases towards the end of the cycle, its amount of CO₂ in the solution may increase at that stage [8]. The absorption effect increases with higher absorption rate for MEA, DEA and NH₃(aq) to the range of and mol/sec/cm² [3].

C. Reaction temperature

Temperature is an important parameter of any chemical, biological, and physical reactions. Chemical absorption is influenced by temperature and the effect it has is discussed in this section.

Amines

Monoethanolamine (MEA) is a primary amine commonly used as a solvent in chemical absorption. Hsu et al [3] studied absorption of MEA at temperature range of 25-75 °C and 15% gas concentration at a flow rate of 2L/min together with 30% solvent. As presented in Fig. 2, it can be observed that MEA is a good absorbent. An absorber-desorber setup containing packed absorption column with 6 theoretical stages and packed desorption column of 10 theoretical stages was used by Pellegrini et al [10] for simulation of the absorption process with MEA. A removal efficiency of 80% has a MEA to CO₂ ratio above 3 with a

solvent concentration of 20% wt required [10]. The removal efficiency at different solvent to CO₂ ratios is shown in Fig. 3. Ardisorn et al [11] reported that increasing the liquid temperature to 35 °C improved the absorption reaction rate, but a decline in the absorption rate was observed for temperature further than 35 °C. An inverse relationship between temperature and absorption rate was observed by Zare et al [12] and Lars [13] as a result of the reaction zone relocation in the absorption column.

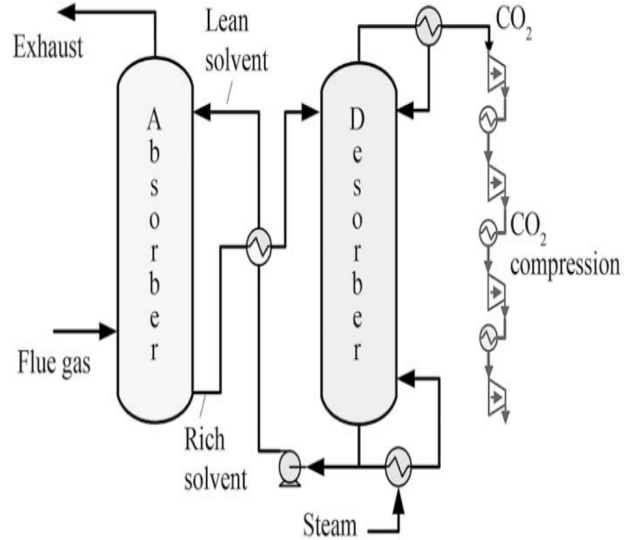


Fig. 2. Schematic diagram of absorption section for CO₂ scrubbing with MEA and DGA solutions [10].

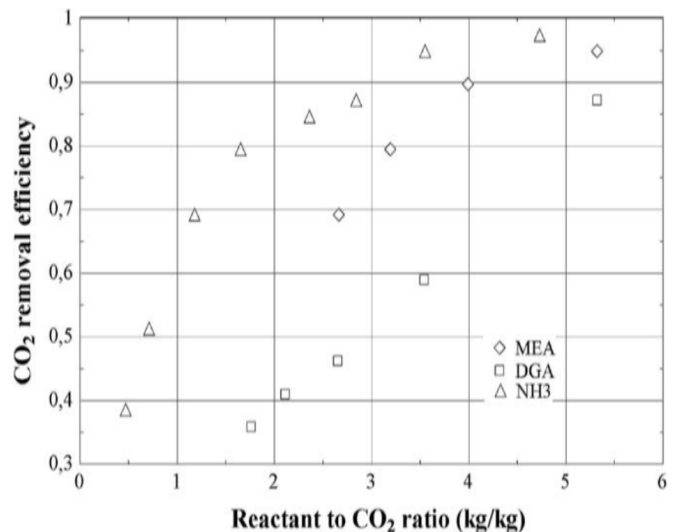


Fig. 3. CO₂ removal efficiency at T = 20 °C of MEA, DGA and NH₃ at different solvent to CO₂ ratios [10].

Ammonia

Ammonia can be used to reduce all acid pollutants in gases with CO₂ included. Hsu et al. [3] used 3% aqueous NH₃ solvent at temperatures of 25, 50 and 75 °C. They observed that absorption rate is directly proportional to the temperature. It has also been reported that ammonia has a better absorption capacity and best absorbent qualities [3, 10, and 14]. According to G. Pellegrini et al. [10], the advantage of using ammonia is that it has low energy requirements for absorption. In a simulation study, using solvent concentration of 0.02-0.2 % wt, the same researchers showed that ammonia had very high removal efficiency at ambient temperature. They further mentioned

that 80% removal efficiency was achieved which means a ratio of 1.5 NH₃ to CO₂ requiring 7% wt solvent. Fig. 2-3 shows the effect of operating temperature on NH₃ absorption and CO₂ removal efficiency at different temperatures, respectively.

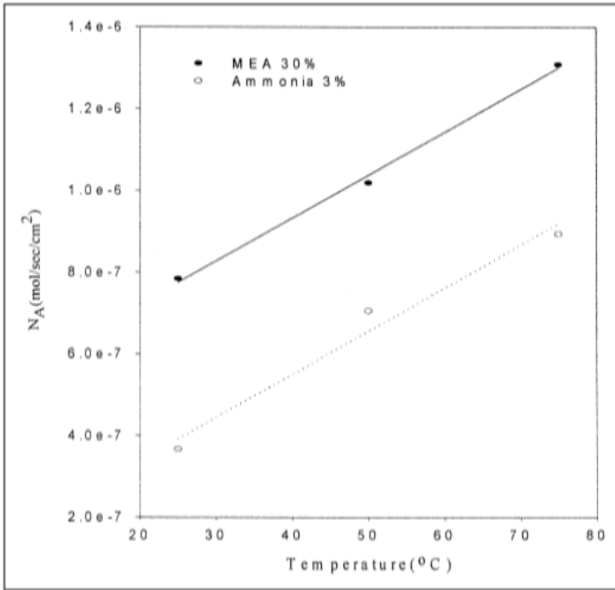


Fig. 4. The effect of operating temperature on the absorption rate of CO₂ into MEA and aqueous NH₃ absorbents [3].

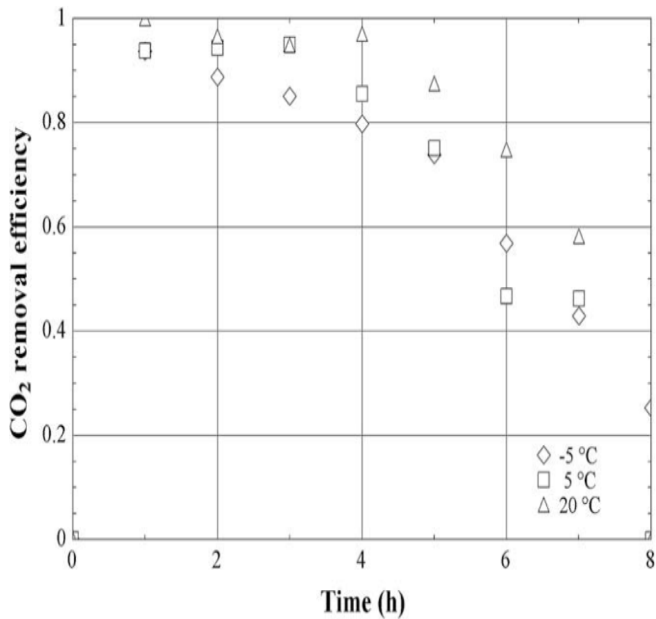


Fig. 5. CO₂ removal efficiency by ammonia solution (5% wt. NH₃ in H₂O) at different temperatures [10].

Sodium Hydroxide

Sodium hydroxide reacts with carbon dioxide by path shown in Eqs (1) to (3) which is first order with respect to CO₂ and OH⁻ [15].

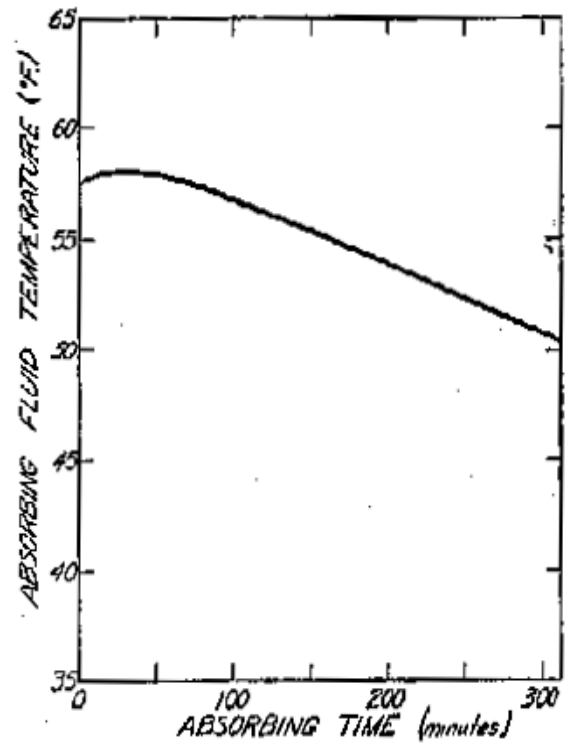





Fig. 6. Absorption fluid temperature and residence time [8].

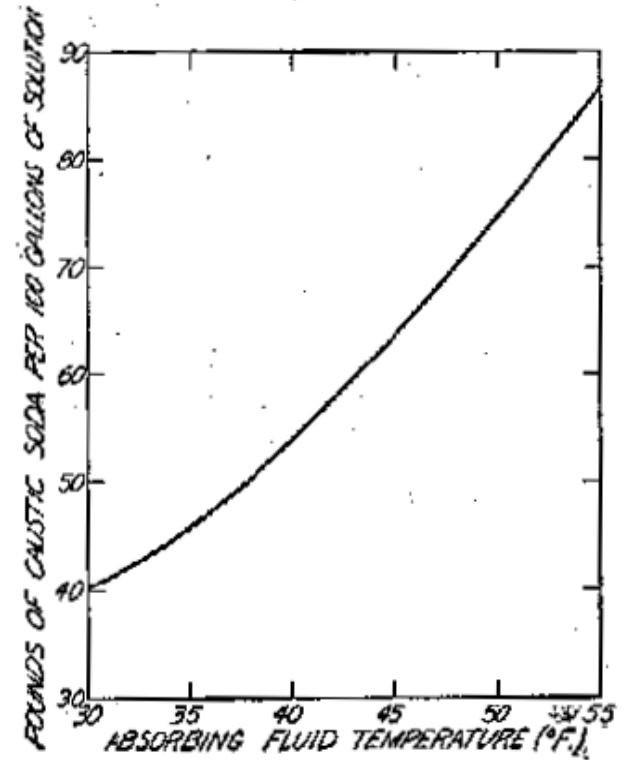


Fig. 7. Absorption temperature characteristics [8].


Temperature range between -1-16 °C (30-60 °F) was used for absorption of CO₂ in sodium hydroxide. The rate of absorption increases with the increase in temperature. The relationship between the temperature and absorption cycle, as shown in Fig. 5, demonstrated that an increase in temperature is often result in a gradual decrease in the rate of CO₂ absorption at the later stages of the cycle [8]. The temperature of the absorbing fluid is also related to the absorbing system design as shown in Fig 6.

Calcium Oxide and Calcium Hydroxide

When calcium oxide is used to absorb CO₂, the process is reversible and occurs according to the following reaction:



Sometimes the CaCO₃ reacts when it is exposed to water vapour and can result in the formation of Ca(OH)₂ as shown in Eq. (5).



CaO₃ is effective in absorbing CO₂ completely, but a penalty of high heat requirements has to be paid. According to a study conducted by Nikulshina et al. [16], temperature range of 300-390 °C is required. Thus it can be said that CO₂ absorption rate is dependent on temperature. The extent of CO₂ absorption (X_{CO₂}) by CaO and Ca(OH)₂ as a function of temperature is shown in Fig 8-9 [17]. Which gives a picture that Ca(OH)₂ captures more CO₂ as compared to CaO as expected and supported and by other researchers [18].

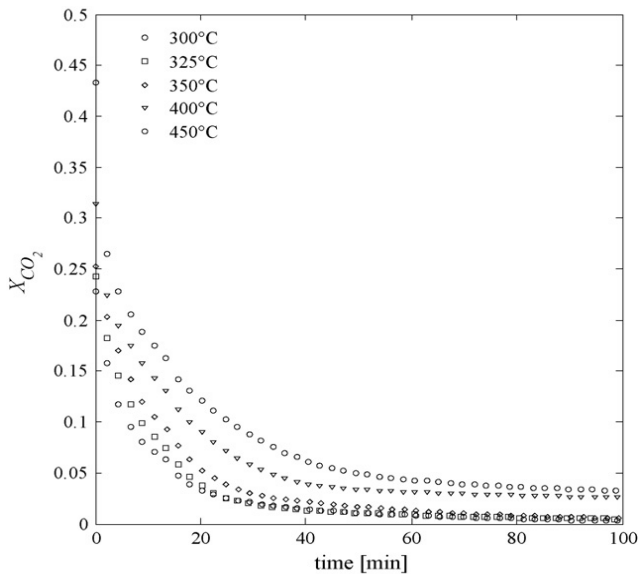


Fig. 8. Extent of CO₂ captured by the carbonation of CaO as a function of time for the isothermal runs of set I in the range 300–450 °C [18].

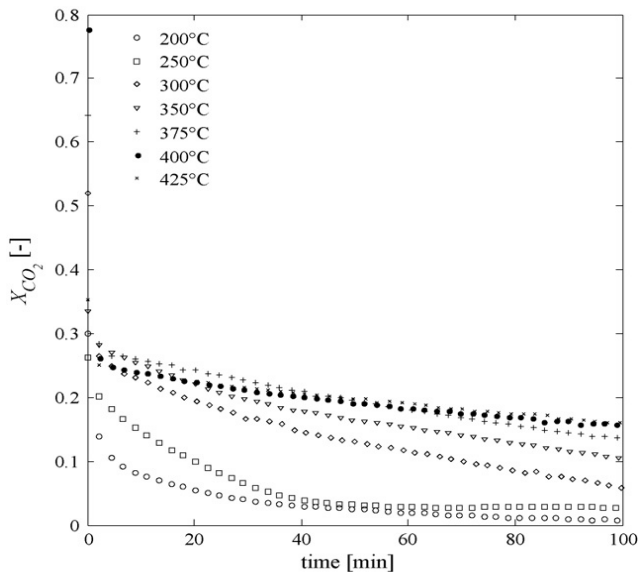


Fig. 9. Extent of CO₂ captured by the carbonation of Ca(OH)₂, as a function of time for the isothermal runs of set II in the range 200–425 °C [18].

Potassium Hydroxide

In a study conducted by Yih et al [7], K₂CO₃ was used to simultaneously absorb H₂S and CO₂. They observed that increased temperature caused a quick increase in absorption rate of CO₂ while that of H₂S decreases slowly as shown in Fig. 8. CO₂ absorption is liquid-phase mass transfer coefficient and H₂S is gas-phase mass transfer. A temperature range of 22-80 °C was used.

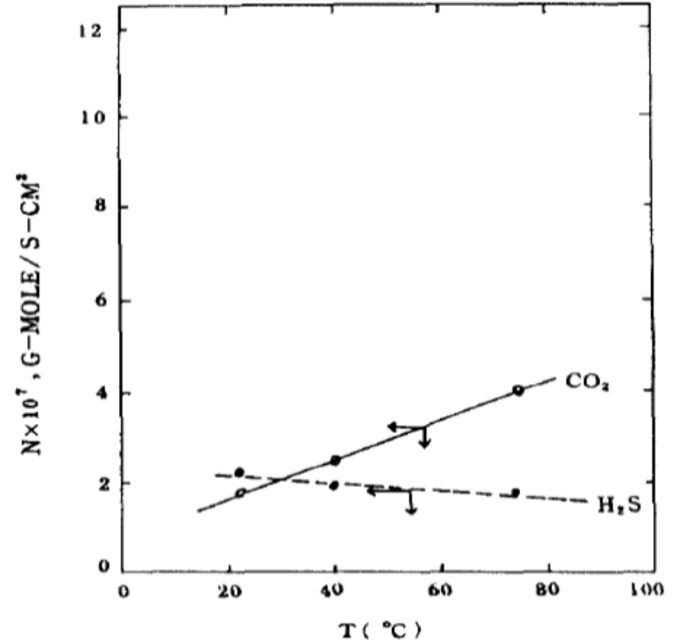


Fig. 10. Absorption rate vs temperature for simultaneous absorption of CO₂ and H₂S in K₂CO₃. [7].

Iron chelates

When FeCl₂, FeCl₃ or FeSO₄ are added to the digester, FeS forms a precipitate which is removed with the digestate because it is insoluble. Ferric chelates can also be used for H₂S absorption and the operating conditions and typical setup are shown in Table 1 and Fig. 11, respectively. Deshmukh et al [19] proved that the removal of H₂S at both low and high concentration is possible with the ferric chelate oxidative absorption process.

TABLE 1: TYPICAL OPERATING CONDITIONS OF IRON CHELATE BASED PROCESSES [19]

Temperature	20-60°C
pH	4-8
Important chelants	EDTA, HEDTA, NTA, DTPA
Iron concentration	1000 to 10000 ppm
Chelant/iron ratio (M)	1.1-2

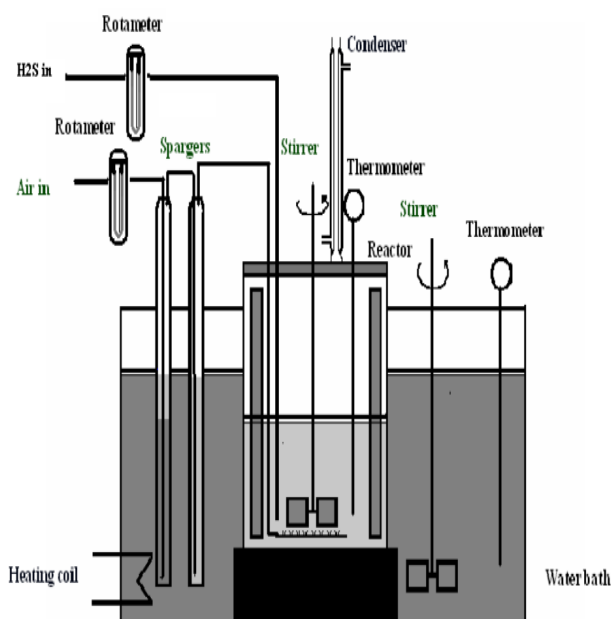


Fig. 11. Experimental setup for oxidative absorption of Hydrogen Sulfide [19].

Heated CO₂

Kibicho et al. [4] investigated the effect of heating the CO₂ gas stream prior to absorption at 25-55 °C. They observed that a 33% linear increase for 0.8 lpm liquid load. They further reported that higher liquid loads of 1.4 and 1.8 lpm reduced the heating effect as it resulted in absorption rate increase by 20% and 3%. They believed that this was due to the kinetic energy attained at the reaction zone as the molecules diffuse faster. As a result of the hot CO₂, formation of carbonic acid is enhanced as heat is transferred to the mixture.

Absorbing surface area

Surface area is an important aspect of any chemical reaction. The rate of absorption is influenced by the contact area between the absorbing fluid and the gas. Consequently, surface contact area is proportional to the rate of absorption [8]. Thus, the absorption column configuration also plays an important role in absorption rate.

III. ENERGY DUTY REQUIREMENTS

Thermal energy input required for complete CaO-CaCO₃ thermochemical cycle is 10.6 MJmol⁻¹ of CO₂ captured. The required thermal energy input for solvent regeneration leads to an energy penalty ranging from 4-5 GJ/t CO₂ captured in post combustion CO₂ capture using amines. This applies for the traditional absorber-desorber process [10, 20]. However, absorption process with ammonia has lower energy requirements because it does not require solvent regeneration heat and separated CO₂ compression. Subsequently, ammonia process requires a great amount of water for exhaust gas washing to prevent emissions to the atmosphere [10]. This, however, still makes the ammonia process economically attractive [21]. Energy requirements for gas scrubbing using alkali metal hydroxide solutions range between 30 to 390 kJ/mol [22].

IV. CONCLUSION

Chemical absorption has been used in biogas purification and upgrading worldwide. Effective as it is, there are some factors that can influence its efficiency. These factors include: pH of the solvent, concentration, temperature of both the gas and the solvent, effect of heated carbon dioxide and absorbing surface area. Concentration of carbon dioxide in the gas stream and the loading rate influence the rate of absorption. The rate of absorption increases with the increase in temperature. A linear increase results from heating the CO₂ gas stream prior to absorption. The rate of absorption is influenced by the contact area between the absorbing fluid and the gas.

ACKNOWLEDGMENT

The authors acknowledge the South African National Energy Development Institute (SANEDI) and Global Excellence Scholarship (GES) for financial support. The department of Chemical Engineering at the University of Johannesburg is also acknowledged for supporting this research.

REFERENCES

- [1] P.V. Dangkwerts, The absorption of gases in liquids, Department of chemical engineering, University of Cambridge, U.K., pp. 625-642, available online at <http://pac.iupac.org/publications/pac/pdf/1965/pdf/1004x0625.pdf>, accessed 10 April 2015.
- [2] R. L. Earle, Unit Operations in Food Processing: Contact Equilibrium Processes (Cont'd) Part 2 - Applications, Published by NZIFST (Inc.), (1983).
- [3] C.H. Hsu, H. Chu, and C.M. Cho, Absorption and Reaction Kinetics of Amines and Ammonia Solutions with Carbon Dioxide in Flue Gas, *J. Air & Waste Manage. Assoc.* 53:246-252, 2012.
- [4] Kibicho, K., H. M. Ndiritu, and B. B. Gathitu. "Effect of Heating on Absorption of CO₂ as Greenhouse Gas in a Structured Packed Scrubber." (2011).
- [5] M. Mahmoudkhani, K.R. Heidel, J.C. Ferreira, D.W. Keith and R.S. Cherry, Low energy packed tower and caustic recovery for direct capture of CO₂ from air. *Energy Procedia*, 1, 1535-1542, 2009.
- [6] Wubs HJ, Beenackers AACM (1994) Kinetics of H₂S absorption into aqueous ferric solutions of EDTA and HEDTA. *AICHe Journal* 40: 433-444.
- [7] Yih, Siu-Ming, and Chi-Chun Sun. "Simultaneous absorption of hydrogen sulphide and carbon dioxide into potassium carbonate solution with or without amine promoters." *The Chemical Engineering Journal* 34.2 (1987): 65-72.
- [8] Pflug, I. J., Angelini Pio, and D. H. Dewey. "Fundamentals of carbon dioxide absorption as they apply to controlled-atmosphere storages." Department of Agricultural Engineering and Horticulture (1957).
- [9] Leva, Max. "Tower packings and packed tower design." (1953).
- [10] G. Pellegrini, R. Strube and G. Manfrida, Comparative study of chemical absorbents in postcombustion CO₂ capture, *Energy* xxx (2009) 1-7.
- [11] Ardisorn, A. Veawab, and T. Paitoon, "Behavior of the mass transfer coefficient of structured packings in carbon dioxide absorbers with chemical reactions," *Industrial and Engineering Chemistry Research*, vol. 38, pp. 2044-2050, 1999.
- [12] Zare and S. Mirzaei, "Removal of CO₂ and H₂S using aqueous alkanolamine solutions," *World Academy of Science, Engineering and Technology* 49 2009, vol. 49, pp. 194-203, 2009.
- [13] E. Lars, "Aspen hysys simulation of CO₂ removal by amine absorption from a gas based power plant," SIMS2007 conference, 2007.
- [14] Olutoye, M. A., and A. Mohammed. "Modelling of a Gas-Absorption Packed Column for Carbon Dioxide-Sodium Hydroxide System." *AU JT* 10 (2006): 132-140.

- [15] Nikulshina, V., and A. Steinfeld. "CO₂ capture from air via CaO-carbonation using a solar-driven fluidized bed reactor—effect of temperature and water vapor concentration." *Chemical Engineering Journal* 155.3 (2009): 867-873.
- [16] V. Nikulshina, E. Gálvez, A. Steinfeld, Kinetic analysis of the carbonation reactions for the capture of CO₂ from air via the Ca(OH)₂-CaCO₃-CaO solar thermochemical cycle, *Chem. Eng. J.* 129 (2007) 75–83.
- [17] Bajracharya, R. Dhungana, A. Thapaliya, N. and Hamal, G. (2009) Purification and compression of biogas: A research experience, *Journal of the Institute of Engineering*, 7, pp. 1-9.
- [18] G.M Deshmukh, A. Shete and D.M Pawar, Oxidative Absorption of Hydrogen Sulfide using Iron-chelate Based Process: Chelate Degradation, *J. Anal Bioanal Techniques*, 1-4, 2012.
- [19] Deshmukh, G. M., Shete, A. and Pawar, D. M. (2013), Oxidative absorption of hydrogen sulfide using an iron-chelate based process: chelate degradation. *J. Chem. Technol. Biotechnol.*, 88: 432–436.
- [20] Abu-Zahra M, Versteeg G. CO₂ capture from power plants Part II. A parametric study of economical performance based in mono-ethanolamine. *International Journal of Greenhouse Gas Control* 2007; 1:135–42.
- [21] Ciferno J, DiPietro P, Tarka T. An economic scoping study for CO₂ capture using aqueous ammonia. NETL Final Report, Pittsburgh, PA, USA; 2005.
- [22] J. Stolaroff, D. Keith, G. Lowry, Carbon dioxide capture from atmospheric air using sodium hydroxide spray, *Environ. Sci. Technol.* 42 (2008) 2728–2735.