

1 **AMENDED The effect of type, concentration and volume of dispersing agent on the**
2 **magnitude of the clay content determined by the hydrometer analysis**

3 **Words 3804**

4 **A Kaur¹ and G C Fanourakis²**

5 ¹Postdoctoral Research Fellow, Department of Civil Engineering Technology, University of
6 Johannesburg, Doornfontein Campus, Johannesburg 2028, South Africa, contact: +27

7 115596898, email: akaur@uj.ac.za

8 ²Associate Professor, FSAICE, Department of Civil Engineering Technology, University of
9 Johannesburg, Doornfontein Campus, Johannesburg 2028, South Africa, contact: +27

10 115596416, email: georgef@uj.ac.za

11
12 **ABSTRACT:** Knowledge of the physical properties of soils, including the clay content, is of
13 utmost importance in the field of Geotechnical Engineering. The hydrometer analysis is the
14 most widely used technique for the analysis of the particle size distribution of the fine grained
15 fraction of a soil, calculated using sedimentation principles. The hydrometer analysis utilizes a
16 dispersing agent. Calgon 33:7 (comprising 33 grams of sodium hexametaphosphate and 7
17 grams of sodium carbonate when mixed in 1 litre of water) is universally considered as the
18 most effective dispersing agent.

19 In this investigation, hydrometer analyses were conducted (according to the TMH1 1986
20 method) on two soils (alluvium and black clay), using five dispersing agents. The results show
21 that the clay size fraction can vary significantly (from 1 % to 32 %) for the two soils, depending
22 upon the dispersing agent used. From these initial results, the two most effective dispersing
23 agents (Calgon and sodium pyrophosphate decahydrate – NaPP) were investigated further to
24 establish the optimum concentration and volume.

25 Calgon proved to be the most effective in the alluvial soil increasing the clay content by 38%.
26 The NaPP was most effective in the relatively active black soil increasing the clay content by
27 25%.

28 **KEYWORDS:** Grain-size analysis, Hydrometer tests, Dispersing agents, Concentration,
29 Volume.

30 **INTRODUCTION**

31 The determination of the particle size distribution of a soil, including the clay content, is one
32 of the most problematic areas in geotechnical engineering testing. The particle size analysis is
33 a method of separating soils into different fractions based on the sizes of particles present in
34 the soil. The particle size analysis is divided into two categories (coarse and fine) with
35 associated laboratory test methods. A sieve analysis is used to separate the coarse grained
36 fraction of soil, i.e. the fraction of soil with particle sizes greater than 425 microns. On the other
37 hand, sedimentation analysis, which is based on the principles of dispersion and sedimentation,
38 is used for the analysis of the fine grained fraction of the soil, such as silt and clay whose
39 particle size is less than 75 microns. Analysis of these fine grained soils is done either by the
40 pipette method or by the hydrometer method (Arora, 2003).

41 Since the clay content of a soil is used to determine its activity, which in turn is used for design
42 purposes, it is very important to accurately determine the clay content of soils. Inaccurate clay
43 content determinations have resulted in inappropriate design solutions which have even led to
44 unacceptable damage to the structures. In South Africa, there is a problem with the accurate
45 determination of the clay content of soils. This problem, which was formally expressed by
46 Jacobsz and Day (2008), reinforces the need for research into all of the variables of the
47 hydrometer test with a view to improving its accuracy and perhaps to standardize the test
48 nationally and possibly, in future, internationally.

49 In the hydrometer analysis, dispersing agents are used to disperse the fine grained particles of
50 the soil in the suspension medium (water). Dispersing agents can either act as a protective
51 colloid on the solid particle or alter the electrical charge on the particle to prevent the formation
52 of flocs (Sridharan et al., 1991).

53 A variety of dispersing agents is used in different parts of the world for the sedimentation
54 analysis. These include sodium silicate and sodium oxalate (TMH1, 1986), Calgon (BS 1377:
55 1990, IS 2720: 1985 and ISRIC: 2002), sodium pyrophosphate decahydrate (Schuurman and
56 Goedewaagen, 1971), sodium tetra pyrophosphate (Yoo and Boyd, 1994), sodium
57 hexametaphosphate (ASTM D422-63, Lambe 1951, SANS 3001) and Di-sodium Di-hydrogen
58 pyrophosphate (formerly used by the Soils Testing Laboratory of Department of Water Affairs
59 of South Africa). The justification for the use of this latter dispersing agent (Di-sodium Di-
60 hydrogen pyrophosphate) could not be established.

61 Calgon, which is a combination of sodium hexametaphosphate and sodium carbonate, is one
62 of the popular dispersing agents adopted by various countries for the sedimentation test
63 analysis. The BS 1377 Part 2 -1990 and IS 2720 - Part IV methods recommend 33 grams of
64 sodium hexametaphosphate with 7 grams of sodium carbonate, while the (South African)
65 Council for Scientific and Industrial Research (CSIR) recommends 35 grams of sodium
66 hexametaphosphate with 7 grams of sodium carbonate and the International Soil Reference and
67 Information Centre (ISRIC) recommends 40 grams of sodium hexametaphosphate with 10
68 grams of sodium carbonate. All the methods mentioned above use 125 ml of solution of the
69 prescribed concentrations, except for ISRIC which uses only 20 ml of solution of the prescribed
70 concentration.

71 Sridharan et al (1991) described a study on the effect of different types and quantities of
72 dispersing agents on the grain size distribution, particularly the percentage of clay sized
73 material. They concluded that the clay size fraction can vary from 4% - 45% for marine clays,

74 depending upon the dispersing agent used, strictly following the IS (1985) method. It was
75 further seen that 100 – 125 ml of Calgon (33 grams of sodium hexametaphosphate and 7 grams
76 of sodium carbonate in 1 litre of distilled water) was found to be the most effective dispersing
77 agent.

78 Bindu and Ramabhadran (2010) conducted a study to evaluate the effect of the concentration
79 of the dispersing agent on the hydrometer analysis and attempted to optimize the concentration
80 of the dispersing agent to be added to obtain maximum dispersion. It was observed that the
81 addition of sodium carbonate improved the dispersing capacity of sodium hexametaphosphate.
82 The optimum volume and concentration was found to be 100 ml of 6% mixture of sodium
83 hexametaphosphate and sodium carbonate and there was a significant decrease in dispersion
84 with a further increase in the concentration as well as volume of the dispersing agent added.

85 The objective of the current study was to investigate the effect of different dispersing agents
86 on two different soil samples with varying mineralogy. An effort was made to compare the
87 results of the hydrometer test analyses by varying the concentration and volume of the best two
88 dispersing agents on the two soil samples, following the THM1 (1986) test method.

89 **EXPERIMENTAL DETAILS**

90 **Materials**

91 Two soil samples were collected from various parts of South Africa. The first sample
92 comprised an alluvial soil from the Sebokeng Township in the Gauteng Province and the other
93 was a black soil from the town of Brits in the North-west Province. The Atterberg Limits and
94 Activity of these soils were determined, at the laboratories of the Department of Civil
95 Engineering Technology of the University of Johannesburg, as shown in Table 1. TMH1 (1986)
96 method was used for the determination of the Liquid Limit and Plastic Limit. The clay content
97 was determined by means of the hydrometer analysis (Method A6 of TMH1 – 1986) with a
98 deviation in the prescribed dispersing agent type, quantity and adjustment in the readings by

99 subtracting the hydrometer readings obtained on the “blank” companion specimens to account
 100 for the effect of the dispersing agent. TMH1 (1986) Method A6 prescribes 5 ml of sodium
 101 silicate and 5 ml of sodium oxalate as the dispersing agent. The activities of the soils used for
 102 current study were computed by using the clay content obtained by the hydrometer analysis
 103 when 125 ml of Calgon 33:7 (a solution comprising 33 grams of sodium hexametaphosphate
 104 (NaHMP) and 7 grams of sodium carbonate (Na₂CO₃) in 1 litre of distilled water) was used.

105 **Table 1 Atterberg Limits, Linear Shrinkage and Activity of the soils sampled**

Properties	Alluvial Soil	Black Soil
Liquid Limit (LL)	32	56
Plastic Limit (PL)	16	22
Plasticity Index (PI)	16	34
Clay Content (%)	21.4	32
Activity (A)	0.75	1.07

106 **Hydrometer Tests**

107 Hydrometer analyses were conducted on both samples, according to the TMH1 (1986) method,
 108 to determine their clay content.

109 These analyses were carried out in three stages. Stage I comprised two tests, one on each soil
 110 type, which excluded dispersing agents. These served as the control test results.

111 Stage II testing entailed a total of ten hydrometer tests, five on each of the two soil types, using
 112 the dispersing agents shown in Table 2.

113

114

115

116

117

118

119 **Table 2 Details of various dispersing agents used**

Dispersing Agent	Preparation of Stock Solutions
5 ml of Sodium silicate and 5 ml of Sodium oxalate	Sodium Silicate: Dissolve sodium silicate, preferably the water glass solution (Na_2SiO_3) in distilled water until the solution yields a reading of 36 at a temperature of 20°C on the standard soil hydrometer. Sodium Oxalate: This consists of a filtered saturated solution of sodium oxalate ($\text{Na}_2\text{C}_2\text{O}_4$).
125 ml of Calgon solution	Calgon: Mix 35 grams of Sodium hexametaphosphate ($\text{Na}_6\text{P}_6\text{O}_{18}$) with 7 grams of sodium carbonate (Na_2CO_3) and add a sufficient quantity of distilled water to bring the volume of the solution to one litre.
20 ml of sodium pyrophosphate	Sodium pyrophosphate decahydrate: Mix 36 grams of sodium pyrophosphate decahydrate ($\text{Na}_4\text{P}_2\text{O}_7 \cdot 10\text{H}_2\text{O}$) with a sufficient quantity of distilled water to bring the volume to the solution to one litre.
20 ml of Sodium tetra pyrophosphate	Sodium tetra pyrophosphate: Mix 36 grams of sodium tetra pyrophosphate with a sufficient quantity of distilled water to bring the volume of the solution to one litre.
40 ml of sodium silicate and 40 ml of di-sodium di-hydrogen pyrophosphate	Di-sodium di-hydrogen pyrophosphate: Mix 36 grams of di-sodium di-hydrogen pyrophosphate ($\text{Na}_2\text{H}_2\text{P}_2\text{O}_7$) with a sufficient quantity of distilled water to bring the volume of the solution to one litre. Sodium Silicate: Add sodium silicate syrup (Na_2SiO_2) to distilled water until the solution yields a reading of 36 at the temperature of 19.5°C on the standard soil hydrometer.

120 Stage III comprised further testing, on each of the two soil types, which entailed varying the
 121 concentration and volume of two of the dispersing agents (Calgon and sodium pyrophosphate
 122 decahydrate). These two dispersing agents were selected for further investigation as the results
 123 of the Stage II testing indicated these to be the most effective of the five dispersing agents. The
 124 objective of this Stage III testing was to compute the optimum concentration and volume of
 125 the dispersing agent.

126 Internationally, there are at least four methods (BS 1377 Part 2 – 1990, IS 2720 Part IV – 1985,
 127 South African CSIR, International Soil Reference and Information Centre (ISRIC – 2002)
 128 which recommend the use of Calgon as a dispersing agent. However, all four of them use
 129 Calgon in different concentrations. BS 1377 Part 2 – 1990 and IS 2720 Part IV – 1985 both
 130 recommend 125 ml of Calgon 33:7 (33 grams of sodium hexametaphosphate and 7 grams of

131 sodium carbonate mixed with 1 litre of distilled water), CSIR recommends 125 ml of Calgon
 132 35:7 while ISRIC recommends 20 ml of Calgon 40:10.

133 Amounts of 4%, 4.2%, 5%, 7%, 8% and 9% solution of Calgon and 3%, 3.6%, 5%, 6% and
 134 7% solution of sodium pyrophosphate decahydrate were prepared, by mixing the required
 135 quantity in 1 litre of distilled water. The quantities (in grams) of chemicals added for the
 136 preparation of these stock solutions are given in Table 3.

137 **Table 3 Quantity of chemicals added for preparation of Calgon and Sodium**
 138 **pyrophosphate decahydrate solutions**

Concentration of Solution (%)	Calgon		Sodium Pyrophosphate decahydrate
	Quantity of NaHMP Added (g)	Quantity of Na ₂ CO ₃ Added (g)	Quantity of NaPP Added (g)
3	-	-	30
3.6	-	-	36
4	33	7	-
4.2	35	7	-
5	40	10	50
6	-	-	60
7	60	10	70
8	70	10	-
9	80	10	-

139 In these tests the minimum volumes of Calgon and sodium pyrophosphate decahydrate used
 140 were 100 ml and 20 ml, respectively. These volumes were incrementally increased until the
 141 optimum volume for each concentration was established.

142 **Testing Procedure and Calculations**

143 The testing was in accordance with the procedure described in TMH1 (1986). For all the tests
 144 performed, 50 grams of soil sample passing through a 425 micron sieve was mixed with the
 145 desired quantity of dispersing agent and about 400 ml of distilled water in a canning jar. The

146 soil water mixture was allowed to stand overnight. After the mixture had been allowed to stand,
147 it was dispersed for 15 minutes with a standard paddle. The paddle was washed clean with
148 distilled water allowing the wash water to run into a container with the suspension.

149 The suspension was then poured into the Bouyoucos cylinder and the canning jar was rinsed
150 with distilled water from the wash bottle. The cylinder was then filled with distilled water to
151 1130 ml mark with the Bouyoucos hydrometer (152H) inside. Then, the hydrometer was
152 removed and the cylinder was inverted a few times, using the palm of one hand as a stopper
153 over the mouth of the cylinder to ensure that the temperature was uniform throughout. After
154 bringing the cylinder to a vertical position, a stop watch was started. The hydrometer was
155 inserted and readings were taken at 18 and 40 seconds without removing the hydrometer from
156 the cylinder. The hydrometer was then taken out and rinsed with water and it was again inserted
157 into suspension when the elapsed time was 2 minutes. This reading was noted and the
158 hydrometer was removed and placed in distilled water. This procedure was repeated for the 5
159 minutes, 15 minutes, 30 minutes, 1 hour, 4 hour and 24 hour readings. After taking each
160 hydrometer reading, the temperature of the liquid was recorded. Temperature corrections were
161 applied to the readings.

162 Also a blank solution comprising distilled water and dispersing agent was prepared, in a second
163 Bouyoucos cylinder in the same proportions as solutions prepared with the soil. The dispersing
164 agent and water mixture was also soaked overnight and identical hydrometer tests were
165 performed for the blank solutions.

166 The hydrometer reading taken on the samples which contained soil were appropriately adjusted
167 by subtracting the hydrometer readings obtained on the “blank” companion specimens, at the
168 relevant times. This accounted for the effect of the dispersing agent on the readings. It should
169 be noted that TMH1 does not make any provisions for this correction.

170 The percentages finer than 0.075 mm, 0.05 mm, 0.04 mm, 0.026 mm, 0.015 mm, 0.01mm,
171 0.0074 mm, 0.0036 mm and 0.0015 mm were respectively calculated by the readings taken at
172 18 sec, 40 sec, 2 min, 5 min, 15 min, 30 min, 1 hour, 4 hour and 24 hours, by means by Equation
173 1.

$$174 \quad P = \frac{C \times S_f}{S_m} \quad (1)$$

175 Where, P = Percentage finer than relevant size,

176 S_m = Mass of soil fines used in analysis (50 grams),

177 S_f = Percentage soil fines in total sample (<0.425 mm),

178 C = Corrected hydrometer reading

179 The percentage clay content present in each sample (fraction finer than 0.002 mm) was
180 obtained from the relevant particle size distribution curve. The tests which gave the best
181 dispersing agent, optimum concentration and volume were repeated to check the consistency
182 of the results.

183 **RESULTS AND DISCUSSION**

184 **Stage I Results**

185 In this stage, two tests were performed, one on each soil. These were the control tests that
186 excluded dispersing agents. Figure 1 shows the soil suspension after 24 hours of both the black
187 soil and the alluvial soil. In both the cases, it can be seen that the supernatant water is almost
188 clear of soil grains including colloids.

189 [Insert Figure 1]

190 The particle size distribution curves for these two control tests are shown in Figure 2.

191 **Stage II Results**

192 The particle size distribution curves obtained for the two soil types, with the use of each of the
193 five dispersing agents used (detailed in Table 2), are shown in Figure 2.

194 [Insert Figure 2]

195 From Figure 2, it is evident that the control samples of both the alluvial and black soils yielded
196 near zero clay contents.

197 The analyses using the five dispersing agent types indicated that, the clay content of the alluvial
198 soil ranged from 7 % to 21 % and that of the black soil ranged from 0.1 % to 32 %. Further, it
199 can be seen that in the case of both soil types, Calgon (combination of sodium
200 hexametaphosphate plus sodium carbonate), which has been recommended by many methods
201 and researchers internationally (BS 1377 Part 2 - 1990, IS 2720 Part IV - 1985, ISRIC - 2002,
202 Bindu and Ramabhadran (2010) and Sridharan et al (1991)), yielded the maximum clay
203 content. This was most effective in the case of the black soil.

204 The second best dispersing agent, after Calgon, was found to be sodium pyrophosphate
205 decahydrate (NaPP). Calgon yielded 21 % and 32.1 % clay content while sodium
206 pyrophosphate decahydrate yielded 20 % and 20.5 % clay content in alluvial and black soil,
207 respectively.

208 In addition, sodium silicate and sodium oxalate, which is prescribed in TMH1 (1986) was the
209 least effective dispersing agent in the case of the black soil yielding a clay content of 0%. The
210 least effective dispersing agent in the case of the alluvial soil was sodium silicate and di-sodium
211 di-hydrogen pyrophosphate which yielded a clay content of 6.2 %.

212 **Stage III Results**

213 *Calgon*

214 The effect of different concentrations and volumes of Calgon, for the alluvial and black soils
215 is shown in Figures 3 and 4, respectively. The clay contents determined by the different
216 concentration and volume combinations are shown in Table 4. The best and worst results for
217 each concentration are shown in green and red, respectively.

218 [Insert Figure 3]

219 [Insert Figure 4]

220 It is evident that at the volume of 125 ml (the volume recommended by BS 1377 Part 2 - 1990
 221 and IS 2720 Part IV - 1985), 5% Calgon yielded the maximum clay content of 25.5% for the
 222 alluvial soil (Figure 3 and Table 4), while for black soil, the 4.2%, 5% and 7% Calgon all
 223 yielded the maximum clay content of 32 % (Figure 4 and Table 4).

224 **Table 4 Variation of clay content depending on the concentration and volume of Calgon**
 225 **added to alluvial soil and black soil**

Volume (ml)	Alluvial Soil						Black Soil					
	4%	4.2%	5%	7%	8%	9%	4%	4.2%	5%	7%	8%	9%
100	19.7	22.8	22.7	21.5	22.2	25	28.5	32.5	28.2	30.5	30	26.6
125	20.1	21.4	25.5	23.2	21.1	24.3	29.1	32	32	32	29	26.4
150	20.2	23	23.5	21.8	24.7	22.1	28.2	32.6	33.7	28.4	29.5	27.5
175	19.9	21.5	25	21.7	23.3	21.7	28	33	34	28.5	26	25.3
200	18	24	22.5	20.6	23.6	19.5	26.5	35	31.5	26	26.2	22.5
225		29.5	19.7	26.4	23.4	18.2	25.5	34.6	32	27.9	23.5	22
250		20.1	19.5	25	20.7	15.6		32.8	31.6	24.6	22.7	22.2
275				24.4	23.2			32	30.5	21.8	22	20.5
300				24.9	20.7			26	25	22	16.8	18.6
325				20.5					24	19.3	13	16
350				17								11.9
375				15.5								

226 The bold numerals indicate the optimum concentration and volume for each soil type.

227 Figures 3 and 4 and Table 4 indicate the following.

- 228 • The 4.2 % Calgon proved to be the best dispersing agent yielding maximum clay
 229 contents of 29.5 % and 35 % for the alluvial and black soils, respectively. This is in close
 230 agreement with the concentration prescribed by the South African CSIR CA 17 method, but in
 231 disagreement with Bindu and Ramabhadran (2010) and Sridharan et al (1991). According to
 232 Bindu and Ramabhadran (2010), the optimum concentration of Calgon was found to be 53:7
 233 while Sridharan et al (1991) found Calgon 33:7 to be the optimum concentration.

234 • The optimum volumes of Calgon for the alluvial and black soil were 225 ml and 200
235 ml, respectively. This is in disagreement with Bindu and Ramabhadran (2010) and Sridharan
236 et al (1991). An optimum volume of 100 ml (53:7) was obtained by Bindu and Ramabhadran
237 (2010) while Sridharan et al (1991) indicated that 100 - 125 ml of Calgon 33:7 yielded the
238 optimum clay content. The results obtained by Sridharan et al (1991) were in close agreement
239 with the concentrations and volumes prescribed by the British and Indian standards.

240 • Low (4 %) and high (9 %) concentrations of Calgon proved to be less effective in the
241 case of both soils.

242 • In the case of the alluvial soil, 5 % and 8 % Calgon concentrations were more effective
243 than 4.2% Calgon for volumes up to 175 ml.

244 • In the case of the black soil, the 5 % Calgon was more effective than 4.2% Calgon for
245 volumes ranging from 125 to 175 ml.

246 • In the case of the black soil, for all the concentrations of dispersing agent, any further
247 increase in volume of chemical after attaining optimum volume, generally resulted in a
248 decrease in clay content. Similar results were obtained by Bindu and Ramabhadran (2010) and
249 Sridharan et al (1991).

250 With regards to the concentrations of Calgon, no general trend was evident regarding the
251 relative effect of the quantities (ratio of) sodium carbonate and sodium hexametaphosphate on
252 the results obtained for both soils. However, in the black soils, with the exception of the 4%
253 Calgon results, an increase in sodium hexametaphosphate resulted in a decrease in clay
254 contents. This decrease is due to saturation absorption of the dispersants on to the clay particles
255 after which aggregation of particles might occur (Bindu and Ramabhadran (2010)).

256

257

258

259 ***Sodium Pyrophosphate Decahydrate (NaPP)***

260 The effect of different concentrations and volumes of NaPP, for the alluvial and black soils are
 261 shown in Figures 5 and 6, respectively. The clay contents determined by the different
 262 concentration and volume combinations are shown in Table 5. The best and worst results for
 263 each concentration are shown in green and red, respectively.

264 [Insert Figure 5]

265 [Insert Figure 6]

266 **Table 5 Variation of clay content depending on the concentration and volume of NaPP**
 267 **added to alluvial soil and black soil**

Volume (ml)	Alluvial Soil					Black Soil				
	3%	3.6%	5%	6%	7%	3%	3.6%	5%	6%	7%
20	18.4	20	24	24	24.4	10	20.4	20.5	22.3	25.4
40	17.7	25.5	26	25.2	24.7	20	27	26.1	33.5	33.4
60	20.5	24	23.3	25	24.3	22.2	32	32.1	32.5	28
80	19.3	25.4	24.2	24	23.5	21.9	35.2	28.3	34.2	34
100	20.3	24.9	24.9	23.5	23.1	26	32.5	34	33.5	33.4
120	18.7	25.2	25.3	24.7	21.2	26	34	34	33.9	22.7
140		25.1	24.7	21.2		27	32.1	34.8	32	26
160		21.9	24.7			25	33	32.3	34	22.5
180		21.2	25			25	27.8	31.8	26.9	21.3
200		21.1	23.2						20.8	20
220										21
240										17.9

268 The bold numerals indicate the optimum concentration and volume for each soil type.

269 From Figures 5 and 6 and Table 5, the following is evident.

- 270 • In the case of the alluvial soil, 40 ml of NaPP 5% gave the maximum clay content of
 271 26% while 40 ml of NaPP 3.6% yielded a clay content of 25.5% (which is a little less than the

272 former). Hence, NaPP 3.6% may be considered as the optimum concentration for the alluvial
273 soil.

274 • When the test was conducted on the black clay, the clay fraction obtained was at a
275 maximum (35.2 %) when using 80 ml with a 3.6% concentration. Hence, 80 ml of NaPP 3.6%
276 is considered as the optimum concentration and volume for the black soil.

277 • In general, the 3.6 % NaPP appears to be the most effective concentration in the case
278 of both soils.

279 • Low (3 %) and high (7 %) concentrations of NaPP generally proved to be less effective
280 in the case of both soils.

281 • NaPP concentrations of 5 % and 6 % yielded similar results in the case of both soils.

282 • The volume of dispersing agent generally appeared to have an insignificant effect in the
283 volume range of 40 ml to 120 ml in the alluvial soil and for the volumes in excess of 40 ml in
284 the case of the black soil.

285 On the basis of the above, the optimum NaPP volume for the alluvial and black soil appears to
286 be 40 ml and 80 ml, respectively.

287 *Summary of Results*

288 Table 6 shows the optimum concentrations and volumes of Calgon and NaPP for the alluvial
289 and black soil and the clay contents yielded by these dispersing agents.

290

291

292

293

294

295

296

297 **Table 6 Summary of results**

Property	Alluvial Soil		Black Soil	
	Calgon	NaPP	Calgon	NaPP
Optimum Concentration (%)	4.2	3.6	4.2	3.6
Optimum Volume (ml)	225	40	200	80
Clay Content (%)	29.5	25.5	35	35.2
$\Delta\%$ in Clay Content (Relative to Table 1)	38	19	9.4	10
Activity	0.54	0.63	0.97	0.97
$\Delta\%$ in Activity (Relative to Table 1)	-28	-16	-9.4	-9.4

298 With reference to Table 6, it is evident that the Calgon and NaPP yielded the highest clay
 299 contents for the alluvial and black soils, respectively.

300 Furthermore, Figures 3 to 6 and Tables 4 and 5 indicate that increase in volume beyond the
 301 optimum volume resulted in a decrease in the percentage clay content in most cases. However,
 302 a contradictory trend was noticed where, with an increase in volume there was an increase in
 303 percentage of clay content. The reason for this is that with an increase in the volume of
 304 dispersing agent in the companion “blank” solutions, the hydrometer readings increased but
 305 the increase was not constant.

306 It was also found that, in the case of both soils and both dispersing agents, there was no
 307 correlation between the mass of dispersing agent granules in solution and the clay contents
 308 yielded.

309 Furthermore, when comparing the maximum clay contents of the two soils determined as part
 310 of this investigation (Table 6) with those in Table 1, the maximum clay content for the alluvial
 311 soil increased by 38 % (from 21.4 % to 29.5 %). The maximum clay content for the black soil
 312 increased by 10 % (from 32 % to 35.2 %). These increases in clay content resulted in decreases
 313 in the Activity of the alluvial and black soils of 28 % (from 0.75 to 0.54) and 10 % (from 1.07
 314 to 0.97), respectively.

315

316 **CONCLUSIONS**

317 The following conclusions were drawn from the study conducted:

318 Tests with different dispersing agents clearly indicated that the percentage of clay sized
319 material can vary significantly depending upon the type of dispersing agent. In this
320 investigation, which included ten dispersing agent types, Calgon and Sodium pyrophosphate
321 decahydrate (NaPP) were the most effective dispersing agent types.

322 In the case of both soils, the optimum concentrations of Calgon and NaPP were found to be 4.2
323 % and 3.6 %, respectively. Furthermore, 225 ml of Calgon yielded the highest clay content in
324 the case of the alluvial soil whereas 80 ml of NaPP yielded the highest clay content in the case
325 of the black soil.

326 Relatively high and low concentrations of Calgon and NaPP yielded low clay contents in the
327 case of both soil types.

328 No correlation exists between the mass of the dispersing agent granules in solution and the clay
329 contents yielded.

330 The results of this investigation confirm the findings of Means and Parcher (1963) that different
331 dispersing agent types are more effective with certain clay types.

332 Finally, the effect of the dispersing agent on the hydrometer readings, particularly in the case
333 of relatively high volumes, was considerable and hence should be accounted for by accordingly
334 correcting (reducing) the hydrometer readings. The current South African method (SANS
335 3001) which utilizes Sodium hexametaphosphate as a dispersing agent, makes provision for
336 such a correction to the hydrometer readings.

337 **REFERENCES**


- 338 • Arora, K R 2003. *Soil mechanics and foundation engineering*. New York: Standard
339 Publishers Distributers.

- 340 • ASTM 1965. *Grain size analysis of soils*. ASTM Designation D422-63, ASTM,
341 Philadelphia.
- 342 • British Standard, BS, 1990. *Methods of test for soils for civil engineering purposes*. BS
343 Designation 1377 Part 2, BSI, London.
- 344 • Bindu, J and Ramabhadran, A 2010. Effect of concentration of dispersing agent on the
345 grain size distribution of fine grained soil. *Proceedings*, Indian Geotechnical Conference,
346 Mumbai, pp 275-278.
- 347 • Indian Standard IS 1985. *Methods of tests for soils*. IS Designation 2720 Part IV, BIS,
348 New Delhi.
- 349 • International Soil Reference and Information Centre, ISRIC 2002. *Procedures for soil*
350 *analysis*. Technical paper 9, The Netherlands.
- 351 • Jacobsz, S W and Day, P 2008. Are we getting what we pay for from geotechnical
352 laboratories? *Journal of South African Institution of Civil Engineering*, 16(4):8-11.
- 353 • Lambe, T W 1951. *Soil testing for engineers*, New York: John Wiley & Sons, Inc.
- 354 • Means, R E and Parcher, J N 1963. *Physical properties of soils*. Ohio: Charles E. Merrill
355 Book Co.
- 356 • SANS 2014. *Civil engineering test methods*. SABS Standard Division Designation
357 3001 Part GR3, SABS, Pretoria.
- 358 • Schuurman, J J and Goedewaagen, M A J 1971. *Methods for the examination of root*
359 *systems and roots*, Wageningen, The Netherlands: Pudoc.
- 360 • Sridharan, A., Jose, B T., Abraham, B M 1991. Determination of clay size fraction of
361 marine clays. *Geotechnical Testing Journal*, 14(1):103-107.
- 362 • TMH1:1986. *Standard methods of testing road construction materials*. Method A6.
363 Pretoria: National Transport Commission.

364 • Yoo, K H and Boyd, C E 1994. *Hydrology and water supply for pond aquaculture*,
 365 USA: Springer.


366

367 **Figures**

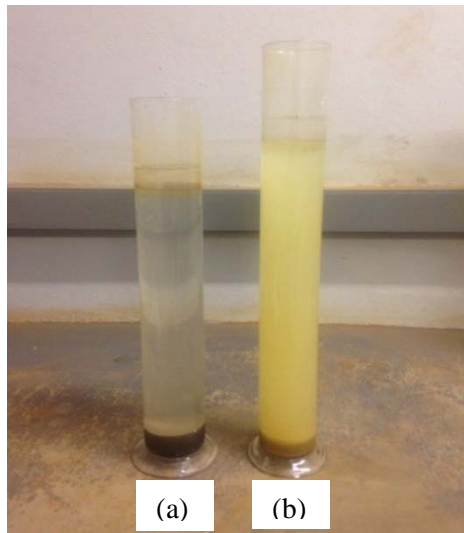


368

369 **Figure 1. a) Black soil without dispersing agent; b) Alluvial soil without dispersing**
 370 **agent.**

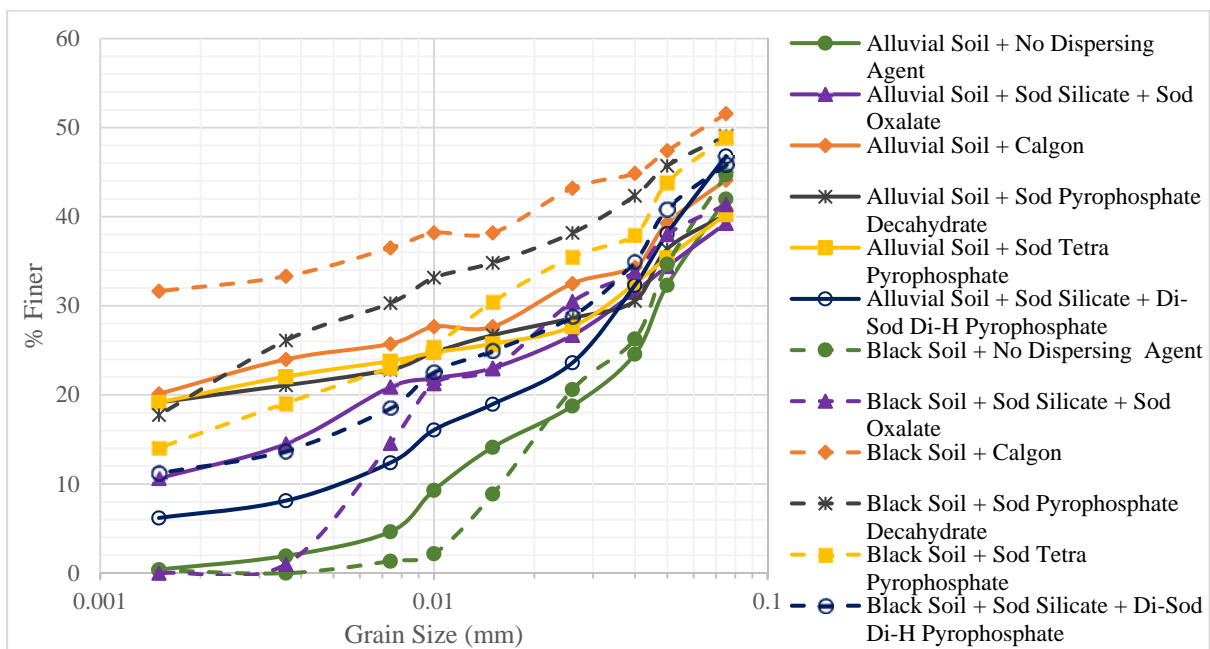

371

372 **Figure 2. Effect of different dispersing agents in grain-size analysis.**

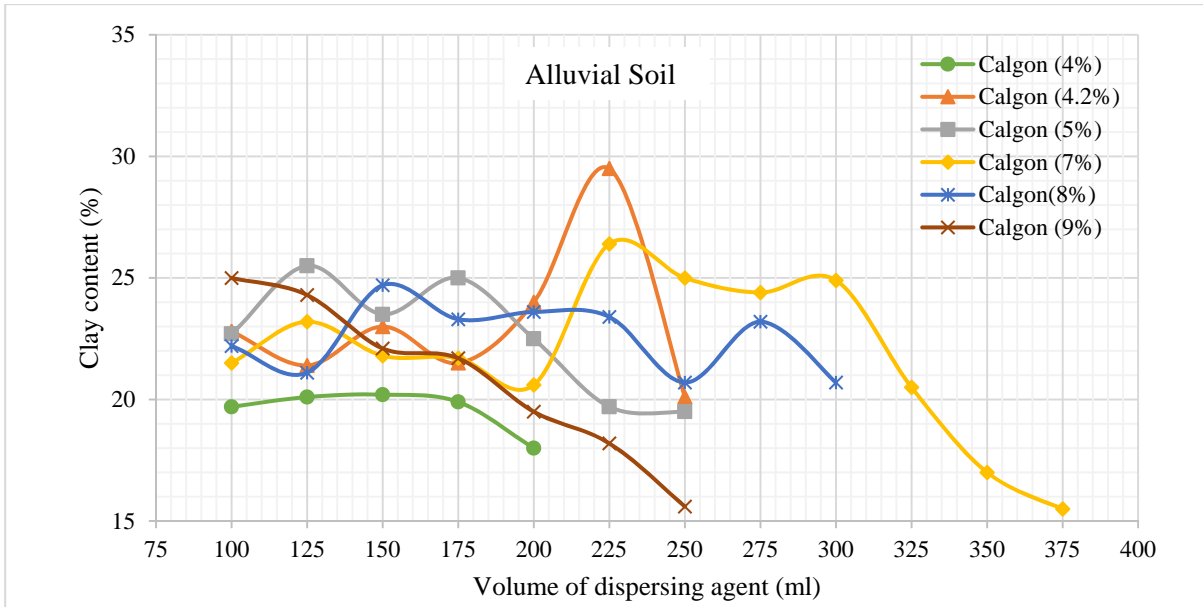


373

374

Figure 3. Effect of volume and concentration of Calgon as a dispersing agent in

375

determining the clay content of Alluvial Soil.

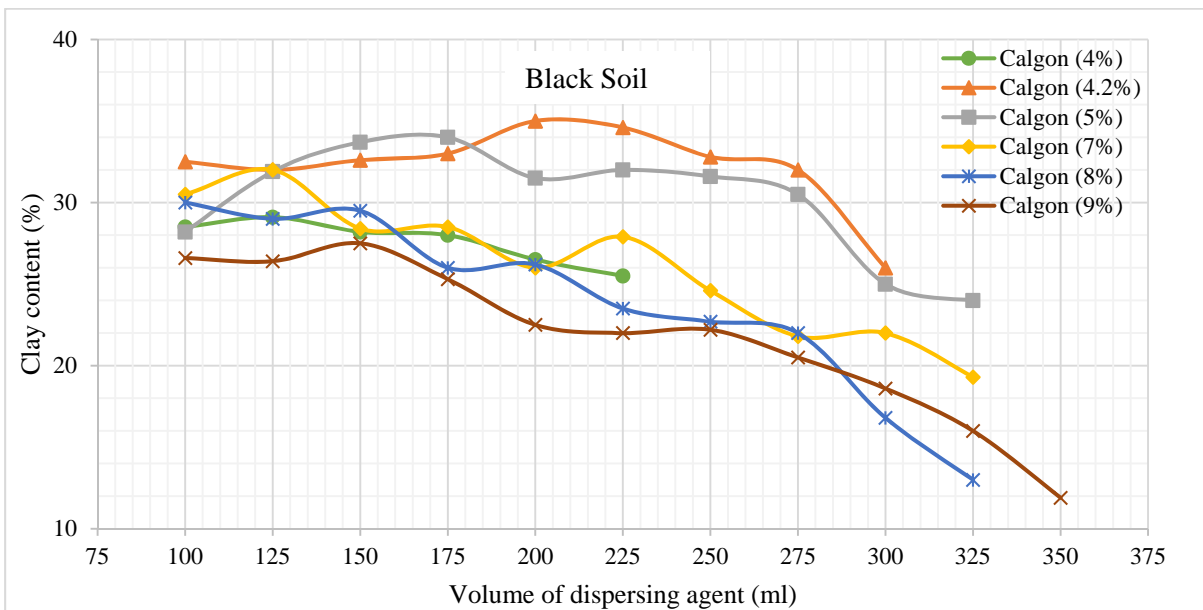


376

377

Figure 4. Effect of volume and concentration of Calgon as a dispersing agent in

378

determining the clay content of Black Soil.

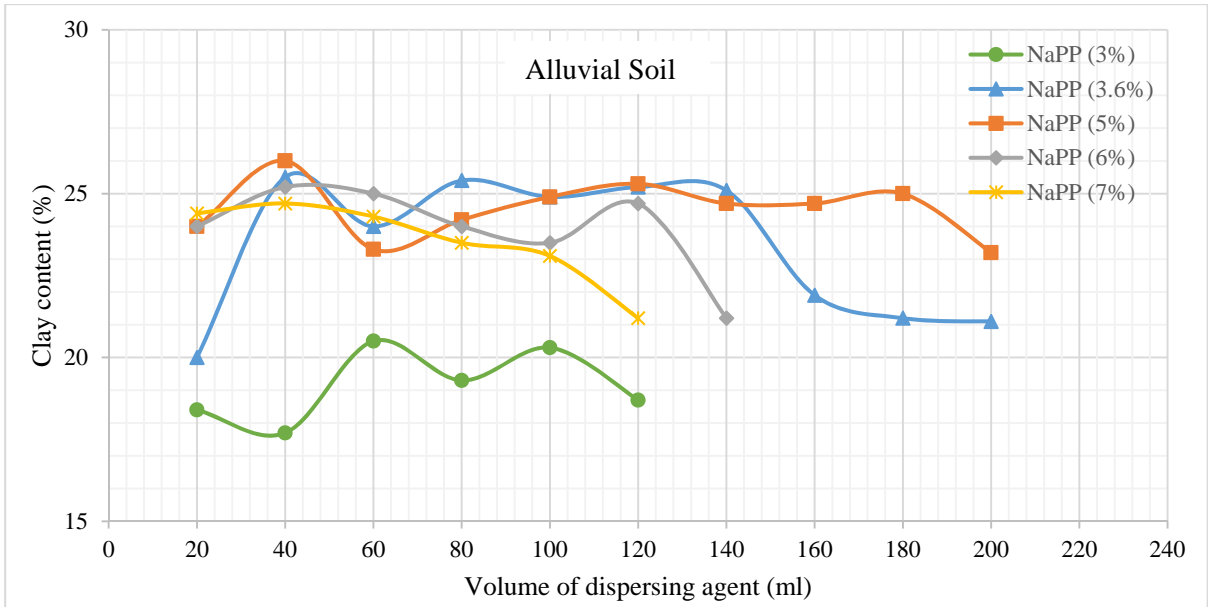


379

380

381

Figure 5. Effect of volume and concentration of NaPP as a dispersing agent in determining the clay content of Alluvial Soil.

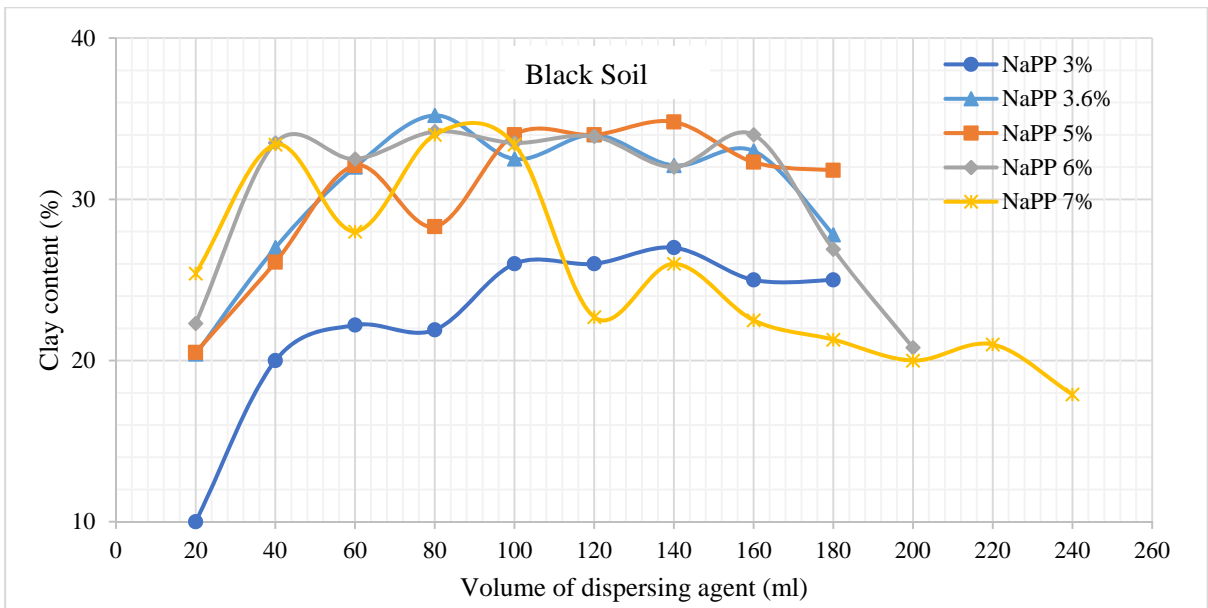

382

383

384

385

Figure 6. Effect of volume and concentration of NaPP as a dispersing agent in determining the clay content of Black Soil.